


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.07.30

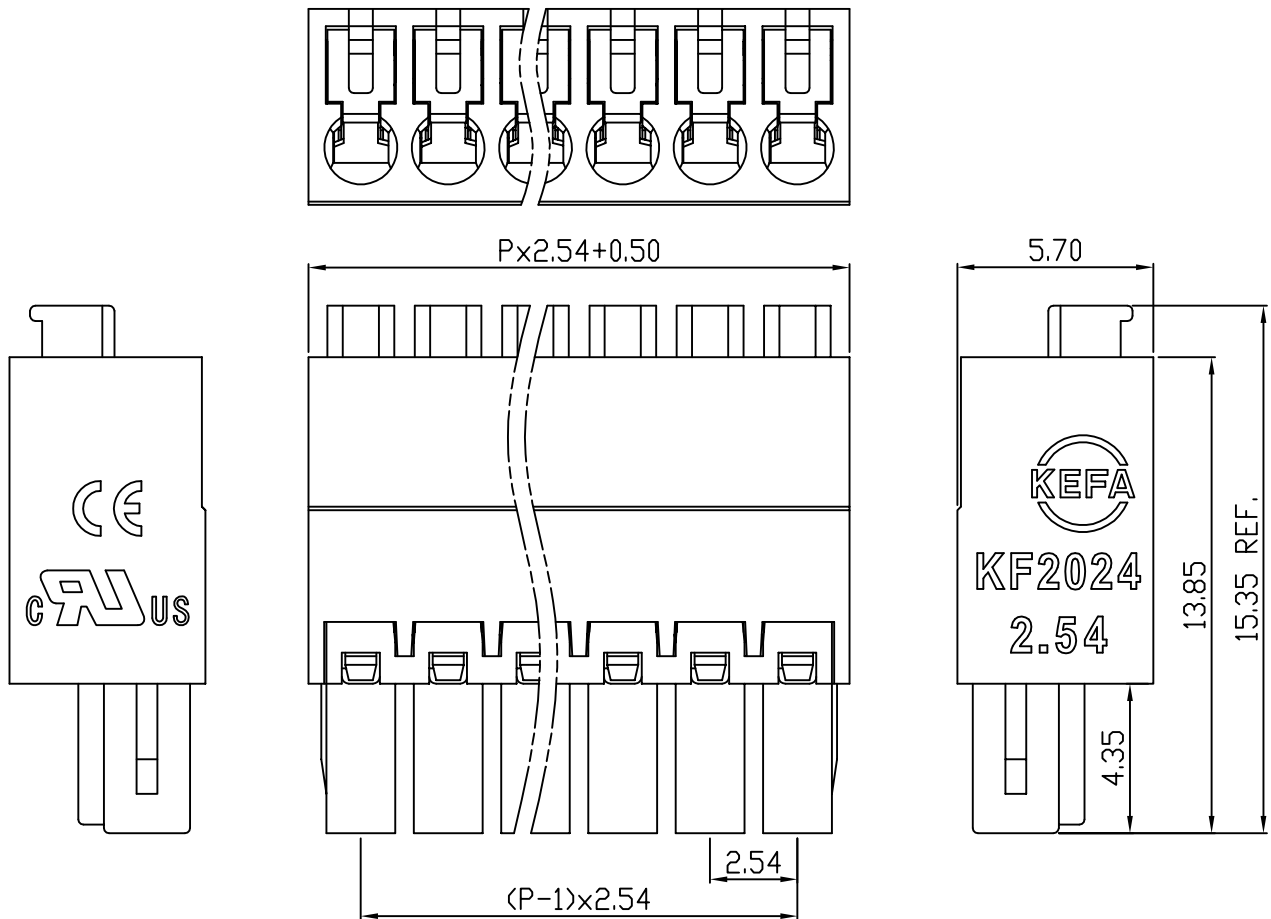

UL/CUL 技术参数				
UL/CUL Technical Data		B	C	D
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	-
额定电流 Rated Current [A]		6	-	-
接线范围 Wire Range		24-20		
单/多芯线 Solid/Stranded [AWG]				
耐电压 Withstanding Voltage		1300V/1Min		
IEC 技术参数				
IEC Technical Data		III	III	II
过电压类别 Overvoltage Category		III	III	II
污染等级 Contamination Class		3	2	2
额定电压 Rated Voltage [V]		32	160	320
额定电流 Rated Current [A]		5.5	5.5	5.5
额定冲击电压 Impulse withstand voltagea [KV]		2.5	2.5	2.5
导线截面积 Conductor cross section		0.5		
硬质/柔性导线 Solid/flexible [mm <sup>2</sup> ]				
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Inflammability		UL94V-0		
导体材料 Contactor Material		铜合金 Copper alloy		
导体表面镀层 Contactive Coating		镀镍 Ni Plated		
一般参数 Other Data				
间距 Pitch [mm]		2.54		
极数 Poles [P]		02-16		
剥线长度 Stripping Length [mm]		7		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		
工作温度 Operating temperatur [°C]		-40~+10 0		
引针尺寸 Pin Dimensions [mm]		-		
PCB板孔径 PCB Hole Diameter [mm]		-		

DES.	SJD	DATE	21.07.30
CHK.	BY	DATE	21.07.30
APP.	CLF	DATE	21.07.30

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1
慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD					

第三视角/THIRD ANGLE PROJECTION	版本/REV	A
名称/TITLE	KF2024-2.54	