
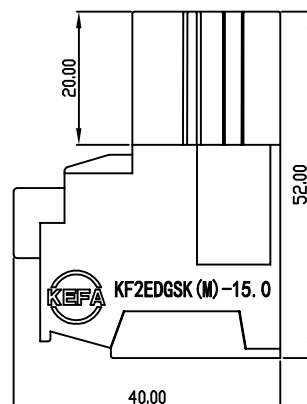
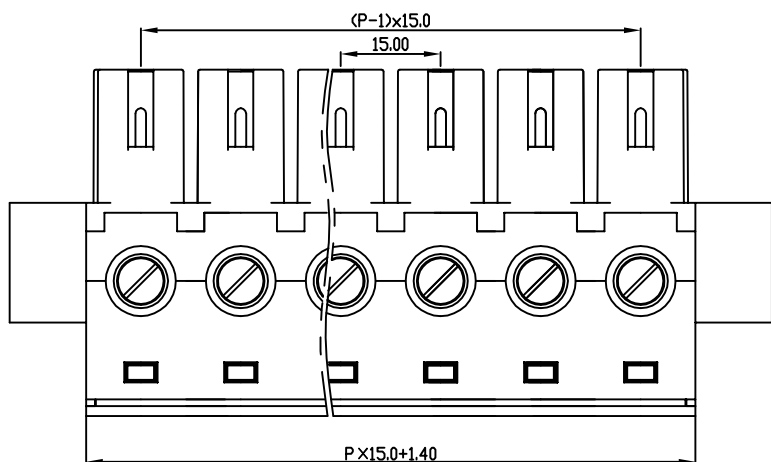
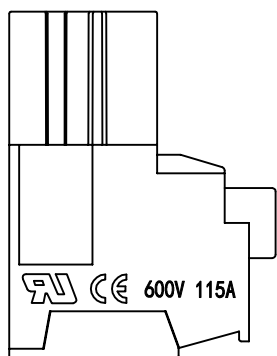


linear dimension(Tolerances Standard GB/T 14486-2008)								—	\square	\perp
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03.15

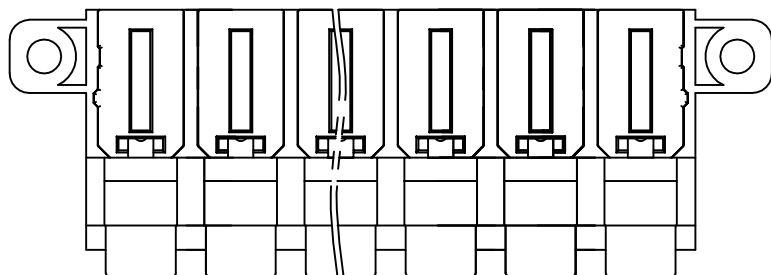


UL/CUL 技术参数 UL/CUL Technical Data						
等级	Use Group		B	C	D	
额定电压	Rated Voltage [V]		600	600	600	
额定电流	Rated Current [A]		115	115	5	
接线范围 单/多芯线	Wire Range Solid/Stranded [AWG]		20-2			
耐电压	Withstanding Voltage		2200V/1min			
IEC 技术参数 IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		-	2	2	
额定电压	Rated Voltage [V]		-	1000	1000	
额定电流	Rated Current [A]		-	125	125	
额定冲击电压	Impulse withstand voltage ^a [KV]		-	8.0	6.0	
导线截面积 硬质/柔性导线	Conductor cross section Solid/flexible [mm ²]		35.0			
材料 Material						
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflammability		UL94V-0			
导体材料	Contactive Material		铜合金 Copper alloy			
导体表面镀层	Contactive Coating		镀镍 Ni plated			
一般参数 Other Data						
间距	Pitch [mm]		15.0			
极数	Poles [P]		2-10			
剥线长度	Stripping Length [mm]		19-20			
螺丝	Screw/扭矩 Torque(Max) [N.m]		M5/2.0			
工作温度	Operating temperatur [°C]		-40--+105			
引针尺寸	Pin Dimensions [mm]		-			
PCB板孔径	PCB Hole Diameter [mm]		-			

DES.	FZM	DATE	21.03.15	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1
CHK.	SY	DATE	21.03.15						
APP.	CLF	DATE	21.03.15						



慈溪市科发电子有限公司
CIXI KEFA ELECTRONIC CO., LTD

第三视角/THIRD ANGLE PROJECTION



版本/
REV

A

名称/
TITLE

KF2EDGSKM-15.0