
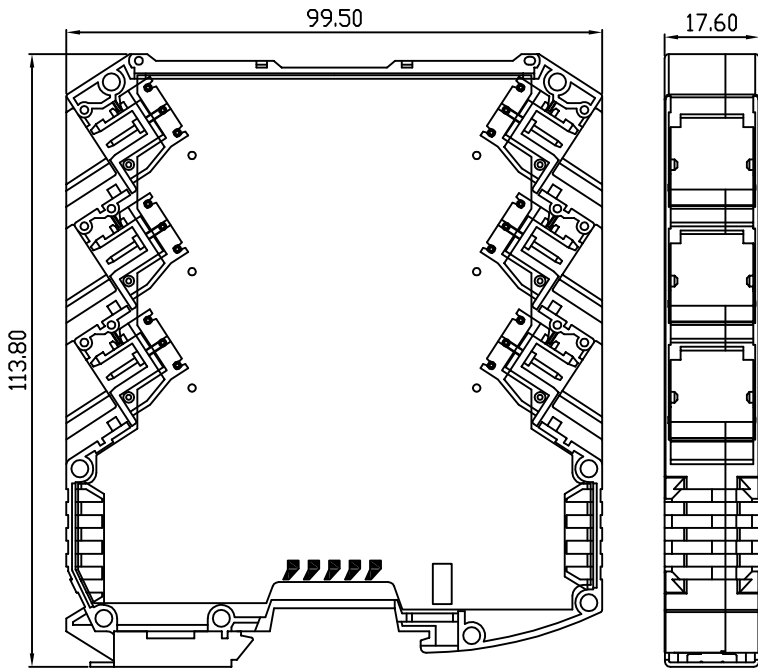


linear dimension(Tolerances Standard GB/T 14486-2008)								— ▯ ⊥			
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100	
	6	to 10	to 30	to 60	to 100	to 160	to 10		to 100	to	
tolerance		±0.20	±0.30	±0.50	±0.70	±1.00	±1.60		0.10	0.30	0.60

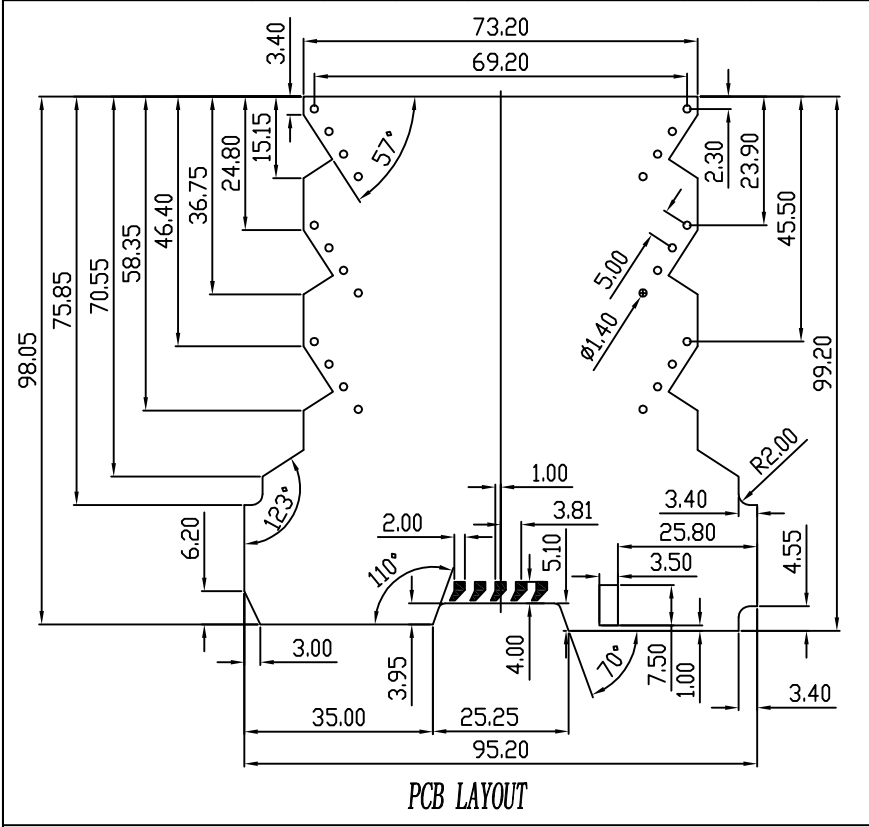

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	22.05.13

UL/CUL 技术参数				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	-	-	-
额定电流	Rated Current [A]	-	-	-
接线范围	Wire Range	-		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	-		
IEC 技术参数				
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	-	-	-
额定电流	Rated Current [A]	-	-	-
额定冲击电压	Impulse withstand voltage ^a [KV]	-	-	-
导线截面积	Conductor cross section	-		
硬质/柔性导线	Solid/flexible [mm ²]			
材料				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflamability	UL94V-0		
导体材料	Contactive Material	-		
导体表面镀层	Contactive Coating	-		
一般参数				
间距	Pitch [mm]	-		
极数	Poles [P]	-		
剥线长度	Stripping Length [mm]	-		
螺丝	Screw/扭矩 Torque(Max) [N.m]	-		
工作温度	Operating temperatur [°C]	-		
引针尺寸	Pin Dimensions [mm]	-		
PCB板孔径	PCB Hole Diameter [mm]	-		

DES.	LQQ	DATE	22.05.13	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	22.05.13		慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD					名称 / TITLE	KFMEX1750	
APP.	CLF	DATE	22.05.13									